

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number  
**WO 01/36328 A1**

(51) International Patent Classification<sup>7</sup>: **C01B 37/06**,  
37/08

(21) International Application Number: **PCT/US00/30319**

(22) International Filing Date:  
3 November 2000 (03.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/166,118 18 November 1999 (18.11.1999) US

(71) Applicant: **EXXON CHEMICAL PATENTS INC.**  
[US/US]; 5200 Bayway Drive, Baytown, TX 77520 (US).

(72) Inventors: **STROHMAIER, Karl, G.**; 47 Rockport Road,  
Port Murray, NJ 07865 (US). **VAUGHAN, David, E., W.**;  
1109 Croton Road, Flemington, NJ 08822 (US).

(74) Agents: **KELLER, Bradley, A. et al.**; ExxonMobil Chem-  
ical Company, P.O. Box 2149, Baytown, TX 77522-2149  
(US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,  
BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE,  
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,  
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD,  
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,  
SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN,  
YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: **METHOD FOR THE SYNTHESIS OF MOLECULAR SIEVES**

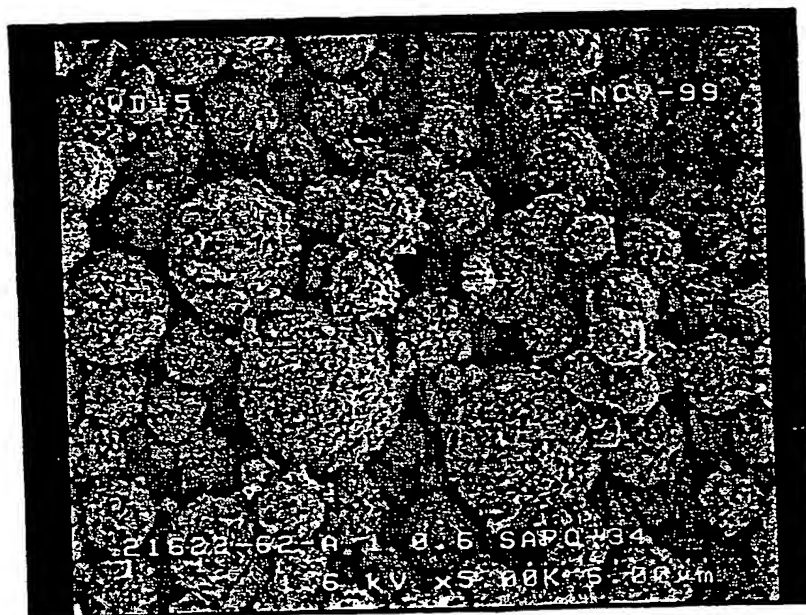

(57) Abstract: The present invention provides a method for the synthesis of MeAPO molecular sieves which includes the following steps: providing a source of alumina, a source of phosphorus, water, and a template suitable for forming a MeAPO molecular sieve; providing a source of metal (Me) including metal particles, the metal particles measuring, in their largest dimension, equal to or less than five nanometers; providing a water soluble organic solvent capable of solubilizing the source of metal; forming a synthesis mixture from the source of alumina, the source of phosphorus, the water, the template, the source of metal, and the solvent; and forming a MeAPO molecular sieve from the synthesis mixture.

**BEST AVAILABLE COPY**

- 1 -

## METHOD FOR THE SYNTHESIS OF MOLECULAR SIEVES

### Field of the Invention

5           The present invention relates to a method for the synthesis of metalloaluminophosphate (MeAPO) molecular sieves and particularly to a process for the synthesis of silicoaluminophosphate (SAPO) molecular sieves.

### 10   Background of the Invention

          Methods for the preparation of metalloaluminophosphates, such as MeAPSOs, EIAPSOs, and MeAPOs are known in the art and are members of a class known as non-zeolitic molecular sieves. (See E.M. Flanigen, B.M. Lok, R.L. Patton, S.T. Wilson, *New Developments in Zeolite Science and Technology*, Y. Murakami et al. eds., Elsevier, Amsterdam, p. 15 103(1986)). These non-zeolitic molecular sieves are referred to herein as MeAPO molecular sieves and have frameworks of  $\text{AlO}_4$ ,  $\text{MeO}_x$  and  $\text{PO}_4$  tetrahedra linked by oxygen atoms. A negative charge in the framework is balanced by the inclusion of exchangeable protons or cations such as 20 alkali or alkaline earth metal ions. The interstitial spaces of channels formed by the crystalline framework enables MeAPOs to be used as molecular sieves in a manner similar to aluminosilicate molecular sieves, such as, for example, zeolites.

          Accordingly, numerous microporous framework structures 25 analogous to the aluminosilicate zeolites can be synthesized having an  $\text{AlPO}_4$  composition and have been called ALPOs. A modified family of materials has been made by the substitution of a metal (Me) for  $\text{Al}^{3+}$  and  $\text{P}^{5+}$  to form the above referenced metals. Although the ALPO structures are neutral frameworks, the substitution of  $\text{Me}^{a+}$  for  $\text{P}^{5+}$  imparts a negative 30 charge on the framework when 'a' is less than 5. By suitable choice of a cation, this can be translated into catalytic activity. However, alternate

- 2 -

substitutions may be possible that may result in a disproportionately low exchange capacity. The exact nature of Me substitution into ALPO structures is complex and highly variable and may depend on both the topology of the ALPO/MeAPO and the method of preparation. (See D. Barthomeuf, *J. Phys. Chem.*, **97**, p. 10092 (1993) and D. Barthomeuf, *Zeolites*, **14**, p. 394 (1994)). The result is that preferred catalysts may be made by a suitable choice of synthesis method.

Because the distribution of Me in the MeAPO framework affects catalytic activity, the catalytic activity of MeAPOs therefore depends on both the global composition and the Me distribution. This has been best demonstrated for  $\text{Si}^{4+}$  on the basis of this NMR techniques. It has been shown for some substitutions that when MeAPOs contain low amounts of the Me, the metal atoms are mostly isolated. However, when the Me content increases, islands of the metal may start to appear, i.e., Me sites having metal atoms and no aluminum or phosphorus atoms in neighboring lattice positions. These metal islands result in a loss of catalytic activity of the molecular sieve, and increase the cost of the catalyst when using expensive metals such as gallium and germanium.

It would, therefore, be desirable to further increase metal content in a MeAPO molecular sieve without forming undesirable metal islands in order to increase catalytic activity and selectivity.

### Summary of the Invention

In order to overcome many of the problems inherent in the prior art, the present invention provides a method for the synthesis of MeAPO molecular sieves.

The method includes the following steps: providing a source of alumina, a source of phosphorus, water, and a template suitable for forming a MeAPO molecular sieve; providing a source of metal (Me) including metal particles, the metal particles measuring, in their largest dimension, equal to or less than five nanometers; providing a water

- 3 -

soluble organic solvent capable of solubilizing the source of metal;  
forming a synthesis mixture from the source of alumina, the source of  
phosphorus, the water, the template, the source of metal, and the solvent;  
and forming a MeAPO molecular sieve from the synthesis mixture.

- 5 Desirably, the metal is silicon and the MeAPO is a silicoaluminophosphate  
molecular sieve.

Another embodiment of the present invention is directed to an  
isocrystalline spheroidal particle comprising a SAPO molecular sieve.  
The particle measures from 0.5 microns to 30 microns in diameter. The  
10 particle further includes crystallites measuring from 0.05 microns to 1  
micron at their largest dimension. This particle is desirably made by the  
process set forth above. Desirably, the particle is a SAPO-34 molecular  
sieve.

Other advantages and uses of the present invention will become  
15 apparent from the following detailed description, appended figures, and  
appended claims.

### **Brief Description of the Drawings**

Fig. 1 shows an electron micrograph at 5,000X magnification of  
20 another SAPO-34 molecular sieve formed by the process of the present  
invention;

Fig. 2 shows an electron micrograph at 5,000X magnification of  
another SAPO-34 molecular sieve formed by the process of the present  
invention; and

25 Fig. 3 shows an electron micrograph at 5,000X magnification of  
another SAPO-34 molecular sieve formed by the process of the present  
invention.

### **Detailed Description of the Invention**

30 The metalloaluminophosphate (MeAPO) molecular sieve of this  
invention comprises a three-dimensional microporous crystal framework

- 4 -

structure of  $[\text{MeO}_2]$ ,  $[\text{AlO}_2]$  and  $[\text{PO}_2]$  tetrahedral units. The MeAPO molecular sieves, made by the processes of the present invention, comprise a molecular framework of corner-sharing  $[\text{MeO}_2]$ ,  $[\text{AlO}_2]$ , and  $[\text{PO}_2]$  tetrahedral units. MeAPO molecular sieves are generally classified as being microporous materials having 8, 10, or 12 membered ring structures. Useful metals (Me) are any metal which is capable of being incorporated into the framework of a molecular sieve. Useful metals are selected from the group consisting of boron, beryllium, chromium, cobalt, gallium, germanium, iron, manganese, magnesium, nickel, silicon, vanadium, zinc and combinations thereof.

The MeAPO molecular sieve of the present invention is made by forming a synthesis mixture from a source of alumina, a source of phosphorous, water, a template useful for forming a MeAPO molecular sieve, a source of a metal (Me), and a water soluble organic solvent. The mixture has the formula (I):



wherein TEMP is the template, SOL is the water soluble organic solvent, and n is dependent upon the charge of the metal.

The template is a structure directing agent. To form MeAPO molecular sieves, these compounds contain elements of Group Va of the Periodic Table of Elements (Lange's Handbook of Chemistry, 13<sup>th</sup> edition, J.A. Dean, ed., McGraw-Hill, New York(1985)), particularly nitrogen, phosphorus, arsenic and antimony, preferably N or P and most preferably N, which compounds also contain at least one alkyl or aryl group having from 1 to 8 carbon atoms. Particularly preferred nitrogen-containing compounds for use as templating agents are the amines and quaternary ammonium compounds, the latter being represented generally by the formula  $\text{R}_4\text{N}^+$  wherein each R is an alkyl or aryl group containing from 1 to 8 carbon atoms. Polymeric quaternary ammonium salts such as  $[(\text{C}_{14}\text{H}_{32}\text{N}_2)(\text{OH})_2]_x$  wherein "x" has a value of at least 2 are also suitably employed. Mono-, di and tri-amines are advantageously utilized, either

- 5 -

alone or in combination with a quaternary ammonium compound or other templating compound. Mixtures of two or more templating agents can either produce mixtures of the desired MeAPOs or the more strongly directing templating species may control the course of the reaction with the other templating species serving primarily to establish the pH conditions of the reaction mixture.

Representative templates include tetramethylammonium, tetraethylammonium, tetrapropylammonium or tetrabutylammonium ions; di-*n*-propylamine, tripropylamine, triethylamine, triethanolamine; piperidine; cyclohexylamine; 2-methylpyridine; N,N-dimethylbenzylamine; N,N-diethylethanolamine; dicyclohexylamine; N,N-dimethylethanolamine; choline; N,N'-dimethylpiperazine; 1,4-diazabicyclo(2,2,2)octane; N-methyldiethanolamine, N-methylethanolamine; N-methylpiperidine; 3-methylpiperidine; N-methylcyclohexylamine; 3-methylpyridine; 4-methylpyridine; quinuclidine; N,N'-dimethyl-1,4-diazabicyclo(2,2,2)octane ion; di-*n*-butylamine, *neo*-pentylamine; di-*n*-pentylamine; isopropylamine; *t*-butylamine; ethylenediamine; pyrrolidine; and 2-imidazolidone. Not every templating agent will direct the formation of every species of MeAPO, i.e., a single templating agent can, with proper manipulation of the reaction conditions, direct the formation of several MeAPO compositions, and a given MeAPO composition can be produced using several different templating agents. Mixtures of two or more templates can produce mixtures of different sieves or predominantly one sieve where one template is more strongly directing than another.

Representative templates for forming a MeAPO-5 molecular sieve include tetraethylammonium hydroxide (TEAOH), tetra-*n*-propylammonium hydroxide (TPAOH), tri-*n*-propylamine (Pr<sub>3</sub>N), tetra-*n*-butylammonium hydroxide (TBAOH) and diethylethanolamine (DEA).

Representative templates for forming a MeAPO-11 molecular sieve include di-*n*-propylamine (Pr<sub>2</sub>NH); tetra-*n*-butylammonium hydroxide

- 6 -

(TBAOH) and di-*n*-propylamine ( $\text{Pr}_2\text{NH}$ ); diisopropylamine (*i*- $\text{Pr}_2\text{NH}$ ) and di-*n*-propylamine.

A representative template for forming a MeAPO-16 molecular sieve, a MeAPO-17 molecular sieve or a MeAPO-35 molecular sieve is quinucidine. Another representative template for forming MeAPO-17 is  
5 cyclohexylamine (CHA).

Representative templates for forming MeAPO-18 include TEOH, di-isopropylethylamine and combinations thereof.

Representative templates for forming a MeAPO-20 molecular sieve  
10 include tetramethylammonium-hydroxide pentahydrate ( $\text{TMAOH}\cdot 5\text{H}_2\text{O}$ ); TEOH; and pyrrolidine.

A representative template for forming a MeAPO-31 molecular sieve is  $\text{Pr}_2\text{NH}$ .

Representative templates for forming a MeAPO-34 molecular sieve  
15 include tetraethyl ammonium salts, cyclopentylamine, aminomethyl cyclohexane, piperidine, triethylamine, cyclohexylamine, tri-ethyl hydroxyethylamine, morpholine, dipropylamine (DPA), pyridine, isopropylamine and combinations thereof. Preferred templates are triethylamine, cyclohexylamine, piperidine, pyridine, isopropylamine,  
20 tetraethyl ammonium salts, and mixtures thereof. The tetraethylammonium salts include tetraethyl ammonium hydroxide (TEOH), tetraethyl ammonium phosphate, tetraethyl ammonium fluoride, tetraethyl ammonium bromide, tetraethyl ammonium chloride, tetraethyl ammonium acetate. Preferred tetraethyl ammonium salts are tetraethyl  
25 ammonium hydroxide and tetraethyl ammonium phosphate.

Representative templates for forming a MeAPO-37 molecular sieve include TPAOH; and TEOH and tetrapropylammonium hydroxide.

Representative templates for forming a MeAPO-40 molecular sieve include TPAOH and ammonium acetate ( $\text{NH}_4\text{OAc}$ ).

30 Representative templates for forming a MeAPO-41 molecular sieve include TBAOH, diethylamine and dipropylamine.

- 7 -

Representative templates for forming a MeAPO-42 molecular sieve include tetramethylammonium hydroxide pentahydrate (TMAOH·5H<sub>2</sub>O) and TEAOH.

5 A representative template for forming a MeAPO-44 molecular sieve is cyclohexylamine.

The source of the metal (Me) may be any source which contains metal particles measuring, in their largest dimension, equal to or less than five nanometers. The source of the metal may be any metal species, for example, the metal may be a cluster of a metal, a complex of a metal, or  
10 particle(s) of a metal. It has been found that, through the use of particles measuring, in their largest dimension, equal to or less than five nanometers, more reactive sieves can be formed because the metal is easily and effectively dispersed in the synthesis mixture. Further, as discussed below, these particle sizes can be used to form molecular  
15 sieves having novel morphologies. To determine the appropriate size of the metal particles useful in the present invention, the particles may be measured by small angle x-ray scattering which is also known by its acronym as SAXS.

The source of the metal may be a monomeric metal compound, an  
20 oligomeric metal compound containing particles measuring equal to or less than five nanometers, and/or metal particles which measure equal to or less than five nanometers. As used herein, the term "monomeric" means each metal atom is not chemically, either directly or indirectly, bonded to another metal atom. As used herein, the term "oligomeric"  
25 connotes a metal species which contains no more than six of the desired metal ions directly or indirectly chemically bonded to each other. Non-limiting examples of useful metals include one or more of tetraalkylorthometallates, such as tetramethylorthometallate, tetraethylorthometallate, tetrapropylorthometallate, and  
30 tetrabutylorthometallate; colloidal metals; and metal sols. Desirably, the source of the metal is a tetraalkylorthometallate.



- 8 -

SOL is a water soluble organic solvent capable of solubilizing the source of the metal. Desirably, the solvent is selected from the group consisting of sulfoxides and C<sub>1</sub> to C<sub>5</sub> oxygenated hydrocarbons.

Desirably, the oxygenated hydrocarbon is selected from the group  
5 consisting of alcohols (branched or normal), ketones, aldehydes, diols and acids. Useful solvents include one or more solvents selected from the group consisting of acetone, 1,2-propanediol, 1,3-propanediol, methanol, ethanol, propanol, isopropanol, butanol, and ethylene glycol. Desirably, the solvent is an alcohol.

10 The source of alumina may be any aluminum species capable of being dispersed or dissolved in an aqueous synthesis solution. Useful sources of alumina are one or more sources selected from the group consisting of the following: hydrated alumina, organo alumina, psuedo-boehmite, aluminum hydroxide, colloidal alumina, and mixtures thereof.

15 The source of phosphorous is one or more sources selected from the group consisting of phosphoric acid; organic phosphates, such as triethyl phosphate, tetraethyl-ammonium phosphate; aluminophosphates; and mixtures thereof. The phosphorous source should also be capable of being dispersed or dissolved in an aqueous synthesis solution.

20 The water used can be from any water source and is desirably deionized.

The synthesis mixture of formula (I) may optionally include a morphology modifying agent (MMA). The MMA can be provided to affect the morphology of the resulting molecular sieve particles. Useful MMAs  
25 include surfactants; divalent cations of alkali earth metals and/or transition metals; trivalent cations; seeds of MeAPO molecular sieves; and recycled synthesis mixture mother liquor. The MMA is preferably a surfactant.

Useful surfactants include one or more of the following surfactants selected from the group consisting of: long chain alkylamines, such as  
30 hexadecylamine, tetradecylamine, dodecylamine, decylamine, or octylamine; dimethyl alkylamine compounds, such as

- 9 -

dimethylhexadecylamine or dimethyloctylamine; and trimethylalkylammonium salts, such as trimethylhexadecylammonium chloride.

5 An aluminophosphate (ALPO) molecular sieve structure can also be formed as an intergrowth of the MeAPO molecular sieves or physically mixed with the MeAPO. Aluminophosphate molecular sieves are crystalline microporous oxides which can have an  $\text{AlPO}_4$  framework. They can have additional elements within the framework, typically have uniform pore dimensions ranging from about 3 angstroms to about 10 angstroms,  
10 and are capable of making size selective separations of molecular species. More than two dozen structure types have been reported, including zeolite topological analogues. Preferred ALPO structures are ALPO-5, ALPO-11, ALPO-18, ALPO-31, ALPO-34, ALPO-36, ALPO-37, and ALPO-46.

15 The MeAPO synthesis mixture of formula (I) is formed by combining the source of phosphorus, water, the source of alumina, the solvent, the source of the metal and a template in a reaction vessel. No particular order of mixing the components is required, however, it is desired that the phosphorus source and water be combined prior to the addition of the  
20 other components.

In a desired embodiment, the source of phosphorus, water and the source of alumina are first mixed in a reaction vessel. Next, the template required to form the desired MeAPO is added to the reaction vessel and the solution is stirred. Then, the solvent, the MMA if employed, and the  
25 source of the metal are added to the reaction vessel.

After the synthesis mixture is formed, it is mixed for a period of time from about 1 minute to about 480 minutes. Desirably, the synthesis solution is mixed for a period of time sufficient to form a gel or slurry which has a homogenous appearance.

30 The reaction vessel containing the synthesis mixture is sealed and heated, desirably under autogenous pressure, to a temperature of at least

- 10 -


80°C, desirably from about 100°C to about 250°C, until a crystalline product is formed. Low temperature and short crystallization times are preferred because those conditions may prevent the formation of undesirable products. The mixture is crystallized at a pressure of from  
5 about 0 bar to about 70 bar. Formation of the crystalline product can take anywhere from around 1 minute to as much as 2 weeks. In some cases, stirring or seeding with crystalline or colloidal material will facilitate the formation of the product. The mixture may be heated in a convection oven, an externally heated autoclave, a microwave autoclave or any other  
10 apparatus currently used in the art to heat such mixtures.

Because the MeAPO molecular sieve product is formed in solution, it can be recovered by standard means, such as by centrifugation or filtration. The process may also include conventional product washing and drying such as by an ethanol rinse and/or a water rinse, with either or  
15 both of the rinses being conducted a plurality of times. The product may then be dried by any conventional drying technique. Typically, the drying is conducted in a convection oven at a temperature from about ambient temperature to about 200°C. The drying may also be conducted in an externally heated autoclave or a microwave autoclave.

20 The process of the present invention is particularly useful for forming a silicoaluminophosphate molecular sieve. The process of the present invention can be used to form a silicoaluminophosphate molecular sieve selected from the group consisting of SAPO-5, SAPO-11, SAPO-16, SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-37, SAPO-  
25 40, SAPO-41, SAPO-42, SAPO-44 and SAPO-47. Desirably, the process of the present invention is used to formulate SAPO-34.

The SAPO molecular sieve of the present invention is made by forming a synthesis mixture from a source of alumina, a source of phosphorous, water, a template capable of forming a SAPO molecular  
30 sieve, a source of a silicon, and a water soluble organic solvent. The mixture has the formula (II):

- 11 -



wherein TEMP is the template and SOL is the water soluble organic solvent. The components are as listed above in the discussion of the MeAPO embodiment.

5           When a SAPO is formed by the process of the present invention, the source of silicon may be any silicon species capable of being dispersed or dissolved in an aqueous synthesis solution. As stated above in regard to the metal, the source of silicon is any source which contains silicon particles measuring, in their largest dimension, equal to or less  
10           than five nanometers. The source of the silica may be any metal species, for example a cluster of silica, a complex of silica, or particles of silica. The source of the silica may be a monomeric silicon, an oligomeric silicon compound measuring equal to or less than five nanometers, and/or silicon particles which measure equal to or less than five nanometers. In this  
15           context, the term "monomeric" means each silicon atom is not chemically, either directly or indirectly, bonded to another silicon atom. As also used in this context, the term "oligomeric" connotes a silicon species which contains no more than six silicon ions directly or indirectly chemically bonded to each other. Non-limiting examples of useful silicon source  
20           materials include one or more of tetraalkylorthosilicates, such as tetramethylorthosilicate, tetraethylorthosilicate (TEOS), tetrapropylorthosilicate, and tetrabutylorthosilicate; colloidal silica; fumed silica; and silica sols.

          The silicoaluminophosphate mixture of formula (II) may be formed  
25           in accordance with the previously described processes.

          In either of the embodiments described above, the resulting synthesis solution has a TEMP:Al<sub>2</sub>O<sub>3</sub> molar ratio of from about 0.1 to about 5, and more desirably from about 0.5 to about 3. The SOL:Al<sub>2</sub>O<sub>3</sub> molar ratio in the synthesis solution is desirably from about 0 to about 30,  
30           and more desirably from about 4 to about 20, and the SiO<sub>2</sub>:Al<sub>2</sub>O<sub>3</sub> molar ratio is desirably from about 0.01 to about 2.0, and is more desirably from

- 12 -

about 0.1 to about 0.8. The  $P_2O_5:Al_2O_3$  molar ratio in the synthesis solution is desirably from about .5 to 1.5 and more desirably from about 0.8 to 1.1. If a MMA is used in this embodiment, then the resulting solution will have a MMA:  $Al_2O_3$  molar ratio of from about 0.01 to about 0.5, and  
5 more desirably from about 0.05 to about 0.3.

The silicoaluminophosphate molecular sieve of this invention comprises a three-dimensional microporous crystal framework structure of  $[SiO_2]$ ,  $[AlO_2]$  and  $[PO_2]$  tetrahedral units. The way Si is incorporated into the structure can be determined by  $^{29}Si$  MAS NMR. See Blackwell and  
10 Patton, J. Phys. Chem., 92, 3965 (1988). The desired SAPO molecular sieves exhibit one or more peaks in the  $^{29}Si$  MAS NMR, with a chemical shift  $\delta(Si)$  in the range of -88 to -96 ppm and with a combined peak area in that range of at least 20% of the total peak area of all peaks with a chemical shift  $\delta(Si)$  in the range of -88 ppm to -115 ppm, where the  $\delta$   
15  $(Si)$  chemical shifts refer to external tetramethylsilane (TMS).

In a desired embodiment of the invention, the process described above forms a SAPO-34 molecular sieve having a novel crystal morphology. This morphology is shown in Figs. 1-3. This morphology is described as being an isocrystalline spheroidal particle comprising a  
20 silicoaluminophosphate molecular sieve. As used herein, the term "spheroidal" means a body that is shaped like a sphere but is not necessarily perfectly round. As also used herein, the term "isocrystalline" describes a non-formulated particle having a textured surface formed by crystallites smaller than the non-formulated particle. The crystallites have  
25 the same composition as the non-formulated particle. By "non-formulated," it is meant that the particle is not a physical agglomeration formed by combining molecular sieve particles or complexes with binders and/or fillers or by external forming devices, such as extruders. The particle itself has a diameter of from about  $0.5\mu$  to about  $30\mu$ . The  
30 crystallites have a width, at their largest dimension, of from about  $0.05\mu$  to

- 13 -

about 2.5 $\mu$ . The diameter of the particle and the size of the crystallites can be determined by scanning electron microscopy (SEM).

The spheroidal particle is desirably formed in the following manner. First, the source of phosphorous, water and the source of aluminum are  
5 mixed, desirably in the listed order, in a reaction vessel. Next, the template is added to the reaction mixture and stirred. The solvent, morphology modifying agent, and the source of silica are added to the mixture. The reaction is then mixed until a synthesis mixture having the appearance of a homogenous gel or slurry is formed. The synthesis  
10 mixture is then heated to form the molecular sieve crystals. After heating, the molecular sieve crystals are recovered by centrifugation followed by an ethanol wash, repeated twice, and a deionized water wash, also performed twice. Finally, the crystals are dried. Examples of this process are presented below in Examples 1-3.

15 It has been found that by varying the concentration of silicon in the synthesis mixture, the size of the spheroidal particle can be adjusted. As the concentration of silicon in the synthesis mixture increases, the diameter of the spheroidal particle will also increase. Similarly, a decrease in the silicon content of the reaction mixture produces a  
20 decrease in the diameter of the spheroidal particle.

This invention will be better understood with reference to the following examples, which are intended to illustrate specific embodiments within the overall scope of the invention as claimed and which are intended to be nonlimiting.

25

#### Example 1. Preparation of spheroidal SAPO-34

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

30 .16MMA: 2 TEMP: Al<sub>2</sub>O<sub>3</sub>: P<sub>2</sub>O<sub>5</sub>: 0.6 SiO<sub>2</sub>: 50 H<sub>2</sub>O: 8 SOL

- 14 -

in which MMA is hexadecylamine ( $C_{16}NH_2$ ), TEMP is tetraethylammonium hydroxide (TEAOH), and SOL is ethanol. The synthesis mixture was formed by mixing together 9.4 g of  $H_3PO_4$ (85%), 9.3 g of deionized water, and 5.60 g of hydrated alumina (Vista Chemical, Catapal B) in a plastic beaker for one minute. The resulting mixture was allowed to age for five minutes and then mixed for one more minute. To this mixture was added 34.2 g of 35% aqueous TEAOH (SACHEM) and the mixture then stirred for two minutes. Then 15.0 g of absolute ethanol, 1.57 g of hexdecylamine and 5.1 g of tetraethylorthosilicate were mixed in. The mixture was mixed for one minute, transferred to a Waring blender and thoroughly homogenized for 5 minutes and then placed in a 125 ml. teflon lined autoclave (PARR). The autoclave was placed in a 200°C oven for 24.5 hours. The product was recovered by centrifugation, reslurried twice with a 50:50 mixture of ethanol and water, and then twice with water. The product was dried in a convection oven at 115°C. Powder X-ray diffraction showed the product to be SAPO-34. Elemental analysis by ICPES gave 5.63% Si, 16.88% Al, and 13.22% P which represents a product stoichiometry of  $Si_{1.16}, Al_{4.99}, P_{3.41}$ . Scanning electron microscopy showed spheroidal isocrystalline particles having a particle size of 2-5  $\mu m$ . These particles are shown in Figure 1.

#### Example 2. Preparation of spheroidal SAPO-34

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

.16MMA: 2 TEMP:  $Al_2O_3$ :  $P_2O_5$ : 1.0  $SiO_2$ : 50  $H_2O$ : 8 SOL

in which MMA was hexadecylamine, TEMP was tetraethylammonium hydroxide and SOL was ethanol. The synthesis mixture was formed by mixing together 9.0 g of  $H_3PO_4$ (85%), 8.9 g of deionized water, and 5.37 g of hydrated alumina(Vista Chemical, Catapal B) in a plastic beaker for one minute. The resulting mixture was allowed to age for five minutes and then mixed for one minute. To this mixture was added 32.8 g of 35% aqueous

- 15 -

TEAOH (SACHEM) and the mixture was then stirred for two minutes. Then 14.4 g of absolute ethanol, 1.50 g of hexdecylamine and 8.1 g of tetraethylorthosilicate were mixed in. The mixture was mixed for one minute, transferred to a Waring blender and thoroughly homogenized for 5 minutes and then placed in a 125 ml. teflon lined autoclave (PARR). The autoclave was placed in a 200°C oven for 24.5 hours. The product was recovered by centrifugation, reslurried twice with a 50:50 mixture of ethanol and water, and then twice with water. The product was dried in a convection oven at 115°C. Powder X-ray diffraction showed the product to be SAPO-34. Elemental analysis by ICPES gave 7.23% Si, 14.67% Al, and 12.64% P which represents a product stoichiometry of  $\text{Si}_{.213}$ ,  $\text{Al}_{.45}$ ,  $\text{P}_{.338}$ . Scanning electron microscopy showed the majority of the product to comprise spheroidal isocrystalline particles having a particle size of 3-6  $\mu\text{m}$ . These particles are shown in Figure 2.

### Example 3. Preparation of spheroidal SAPO-34

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

.16 MMA: 2 TEMP:  $\text{Al}_2\text{O}_3$ :  $\text{P}_2\text{O}_5$ : 1.5  $\text{SiO}_2$ : 50  $\text{H}_2\text{O}$ : 8 SOL

in which MMA was hexdecylamine, TEMP was tetraethylammonium hydroxide, and SOL was ethanol. The synthesis mixture was formed by mixing together 8.5 g of  $\text{H}_3\text{PO}_4$ (85%), 8.5 g of deionized water, and 5.11 g of hydrated alumina (Vista Chemical, Catapal B) in a plastic beaker for one minute. The resulting mixture was allowed to age for five minutes and mixed for one minute. To this mixture was added 31.5 g of 35% aqueous TEOH (SACHEM) and the mixture was then stirred for two minutes. Then 13.7 g of absolute ethanol, 1.43 g of hexdecylamine and 11.6 g of tetraethylorthosilicate were mixed in. The mixture was mixed for one minute, transferred to a Waring blender and thoroughly homogenized for 5 minutes and then placed in a 125 ml. teflon lined autoclave (PARR). The



- 16 -

autoclave was placed in a 200°C oven for 5 days. The product was recovered by centrifugation, reslurried twice with a 50:50 mixture of ethanol and water, and then twice with water. The product was dried in a convection oven at 115°C. Powder X-ray diffraction showed the product to be SAPO-34. Scanning electron microscopy showed the majority of the product to comprise spheroidal isocrystalline particles having a particle size of 8-12  $\mu\text{m}$ . These particles are shown in Figure 3.

#### Example 4. Preparation of SAPO-18.

10

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

2 TEMP:  $\text{Al}_2\text{O}_3$ :  $\text{P}_2\text{O}_5$ : .1  $\text{SiO}_2$ : 50  $\text{H}_2\text{O}$ : 8 SOL

In which TEMP was tetraethylammonium hydroxide and SOL was ethanol.

15 The synthesis mixture was formed by mixing together 19.8 g of  $\text{H}_3\text{PO}_4$ (85%), 15 g of deionized water, and 11.8 g of hydrated alumina(Vista Chemical, Catapal B) in a plastic beaker for two minutes. The resulting mixture was allowed to age for five minutes. To this mixture was added 72.1 g of 35% aqueous TEAOH (SACHEM) and the mixture  
20 then stirred for two minutes. Then 31.6 g of absolute ethanol and 1.8 g of tetraethylorthosilicate were mixed in. The mixture was mixed for two minutes, transferred to a Waring blender and thoroughly homogenized for 5 minutes and then placed in a 125 ml. teflon lined autoclave (PARR). The autoclave was placed in a 200°C oven for 24 hours. The product was  
25 recovered by centrifugation, reslurried once with a 50:50 mixture of EtOH and water, and then once with water. The product was dried in an 115°C oven. Powder X-ray diffraction showed the product to be SAPO-18. Elemental analysis by ICPES gave 0.512 % Si, 17.67% Al, and 19.35% P which represents a product stoichiometry of  $\text{Si}_{.014}$ ,  $\text{Al}_{.505}$ ,  $\text{P}_{.481}$ .

30

- 17 -

## Example 5. Preparation of SAPO-35.

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

- 5           .16 MMA: 2 TEMP:  $\text{Al}_2\text{O}_3$ :  $\text{P}_2\text{O}_5$ : .3  $\text{SiO}_2$ : 50  $\text{H}_2\text{O}$ : 8 SOL  
in which MMA was hexadecylamine, TEMP was triethylmethylammonium hydroxide and SOL was ethanol. The synthesis mixture was formed by mixing together 21.7 g of  $\text{H}_3\text{PO}_4$ (85%), 18.5 g of deionized water, and 13.0 g of hydrated alumina (Vista Chemical, Catapal B) in a plastic beaker  
10 for one minute. The resulting mixture was allowed to age for five minutes. To this mixture was added 62.7 g of 40% aqueous triethylmethylammonium hydroxide (SACHEM) and the mixture then stirred for one minute. Then 34.7 g of absolute ethanol and 5.9 g of tetraethylorthosilicate were mixed in. To one half of the mixture(78.2g)  
15 was added 1.82 g of hexadecylamine The mixture was transferred to a Waring blender and thoroughly homogenized for 5 minutes and then placed in a 125 ml. teflon lined autoclave (PARR). The autoclave was placed in a 200°C oven for 3 days. The product was recovered by centrifugation, reslurried twice with a 50:50 mixture of ethanol and water,  
20 and then twice with water. The product was dried in an 115°C oven. Powder X-ray diffraction showed the product to be SAPO-35. Elemental analysis by ICPEs gave 2.80% Si, 17.27% Al, and 16.46% P which represents a product stoichiometry of  $\text{Si}_{.078}\text{Al}_{.503}\text{P}_{.418}$ .

## 25   Example 6. Preparation of SAPO-41.

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

- TEMP:  $\text{Al}_2\text{O}_3$ :  $\text{P}_2\text{O}_5$ : .4  $\text{SiO}_2$ : 40  $\text{H}_2\text{O}$ : 8 SOL  
30 in which TEMP is diethylamine and SOL is ethanol. The synthesis mixture was formed by mixing together 23.2 g of  $\text{H}_3\text{PO}_4$ (85%), 36.8 g of deionized

- 18 -

water, and 13.9 g of hydrated alumina (Vista Chemical, Catapal A) in a plastic beaker for one minute. The resulting mixture was allowed to age for five minutes and then mixed for one minute. To this mixture was added 7.4 g of diethylamine and the mixture then stirred for two minutes after which the evaporated amine template was replenished. Then 17.7 g of absolute ethanol, 8.4 g of tetraethylorthosilicate, and 23.2 g of deionized water were mixed in. The mixture was transferred to a Waring blender and thoroughly homogenized for 5 minutes and then placed in two 125 ml. teflon lined autoclaves (PARR). One autoclave was placed in a 175°C oven for 16 hours. The product was recovered by centrifugation, reslurried twice with a 50:50 mixture of ethanol and water, and then twice with water. The product was dried in an 115°C oven. Powder X-ray diffraction showed the product to be SAPO-41. Elemental analysis by ICPES gave 1.29 % Si, 18.75% Al, and 20.75% P which represents a product stoichiometry of  $\text{Si}_{1.041}\text{Al}_{1.499}\text{P}_{1.460}$ .

#### Example 7. Preparation of SAPO-41.

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

3 TEMP:  $\text{Al}_2\text{O}_3$ :  $\text{P}_2\text{O}_5$ : .2  $\text{SiO}_2$ : 45  $\text{H}_2\text{O}$ : 4 SOL

in which TEMP was dipropylamine and SOL was ethanol. The synthesis mixture was formed by mixing together 11.7 g of  $\text{H}_3\text{PO}_4$ (85%), 18.3 g of deionized water, and 6.97 g of hydrated alumina(Vista Chemical, Catapal B) in a plastic beaker for two minutes. The resulting mixture was allowed to age for five minutes. To this mixture was added 15.3 g of dipropylamine and the mixture then stirred for two minutes after which the evaporated amine template was replenished. Then 9.3 g of absolute ethanol, 60 mg. of SAPO-41 seeds, 2.1 g of tetraethylorthosilicate and 16.4 g of deionized water were mixed in for one minute. The mixture was transferred to a Waring blender and thoroughly homogenized for 5 minutes and then

- 19 -

placed in a 125 ml. teflon lined autoclave (PARR). The autoclave was placed in a 175°C oven for 24.5 hours. The product was recovered by centrifugation, reslurried twice with a 50:50 mixture of EtOH and water, and then twice with water. The product was dried in an 115°C oven.

- 5 Powder X-ray diffraction showed the product to be SAPO-41. Elemental analysis by ICPES gave 1.807 % Si, 19.45% Al, and 20.4% P which represents a product stoichiometry of  $\text{Si}_{.045}\text{Al}_{.499}\text{P}_{.458}$ .

#### Example 8. Preparation of GeAPO-41.

10

A silicoaluminophosphate synthesis mixture was prepared having the stoichiometry:

.16 MMA: 2 TEMP:  $\text{Al}_2\text{O}_3$ :  $\text{P}_2\text{O}_5$ : .4  $\text{GeO}_2$ : 40  $\text{H}_2\text{O}$ : 8 SOL

- 15 in which MMA was hexadecylamine, TEMP was dipropylamine and SOL was ethanol. The synthesis mixture was formed by mixing together 11.4 g of  $\text{H}_3\text{PO}_4$  (85%), 20 g of deionized water, and 6.83 g of hydrated alumina (Vista Chemical, Catapal B) in a plastic beaker for two minutes. The resulting mixture was allowed to age for five minutes. To this mixture was added 10.0 g of dipropylamine and the mixture then stirred for two
- 20 minutes after which the evaporated amine template was replenished. Then 18.2 g of absolute ethanol, 1.91 g of hexadecylamine, 9.5 g of deionized water, and 5.0 g of tetraethylorthogermanate were mixed in. The mixture was mixed for one minute, transferred to a Waring blender and thoroughly homogenized for 5 minutes and then placed in a 125 ml.
- 25 teflon lined autoclave (PARR). The autoclave was placed in a 200°C oven for 24 hours. The product was recovered by centrifugation, reslurried twice with a 50:50 mixture of ethanol and water, and then twice with water. The product was dried in an 115°C oven. Powder X-ray diffraction showed the product to be GeAPO-41. Elemental analysis by ICPES gave
- 30 6.53% Ge, 16.47% Al, and 15.01% P which represents a product stoichiometry of  $\text{Ge}_{.076}\text{Al}_{.515}\text{P}_{.409}$ .

- 20 -

As a result of the crystallization processes described above and demonstrated in the examples, the recovered MeAPO molecular sieve may contain within its pores at least a portion of the template used in making the initial reaction mixture. The crystalline structure encompasses the template, and the template must be removed so that the molecular sieve can exhibit catalytic activity. Once the template is removed, the crystalline structure that remains has what is conventionally referred to as an intracrystalline pore system. As an additional step, the processes of this invention may also include the step of removing the template from the molecular sieve.

In many cases, depending upon the nature of the final product formed, the template may be too large to move freely through the intracrystalline pore system. In such a case, the template can be removed by a heat treatment process. For example, the template can be calcined, or essentially combusted, in the presence of an oxygen-containing gas, by contacting the template-containing sieve in the presence of the oxygen-containing gas and heating at temperatures from 200°C to 900°C. In some cases, it may be desirable to heat in an environment having a low oxygen concentration. In these cases, however, the result will typically be a breakdown of the template into a smaller component, rather than by the combustion process. This type of process can be used for partial or complete removal of the template from the intracrystalline pore system. In other cases, with smaller templates, complete or partial removal from the sieve can be accomplished by conventional desorption processes such as those used in making standard zeolites.

As another additional step to the processes of the present invention, the processes may include the step of admixing the molecular sieve with additional materials. When blended, the resulting composition is typically referred to as a formulated catalyst, with the formulated catalyst comprising the MeAPO molecular sieve.

- 21 -

Materials which can be blended with the molecular sieve can be various inert or catalytically active materials, or various binder materials. These materials include compositions such as kaolin and other clays, various forms of rare earth metals, other non-zeolite catalyst components, zeolite catalyst components, alumina or alumina sol, titania, zirconia, quartz, silica or silica sol, and mixtures thereof. These components are also effective in reducing overall catalyst cost, acting as a thermal sink to assist in heat shielding the catalyst during regeneration, densifying the catalyst and increasing catalyst strength. The amount of molecular sieve which is contained in the final molecular sieve catalyst product ranges from 10 to 90 weight percent of the total catalyst, desirably 30 to 70 weight percent of the total catalyst.

Additional molecular sieve materials can be mixed with the MeAPO catalyst if desired. Molecular sieves that are suitable for use in this invention include AEI, AFT, APC, ATN, ATT, ATV, AWW, BIK, CAS, CHA, CHI, DAC, DDR, EDI, ERI, GOO, KFI, LEV, LOV, LTA, MON, PAU, PHI, RHO, ROG, THO, MFI, MEL, MTW, EUO, MTT, HEU, FER, AFO, AEL, TON, and substituted forms thereof. These molecular sieves are described in greater detail in the Atlas of Zeolite Structural Types, W.M. Meier and D.H. Olsen, Butterworth Heineman, 3rd ed., 1997, the detailed description of which is explicitly incorporated herein by reference. Preferred molecular sieves which can be combined with the MeAPO include AEI, ERI and CHA type zeolites.

Persons of ordinary skill in the art will recognize that many modifications may be made to the present invention without departing from the spirit and scope of the present invention. The embodiment described herein is meant to be illustrative only and should not be taken as limiting the invention, which is defined by the following claims.

What is claimed is:

- 22 -

Claims

- 1 1. A method for making a metalloaluminophosphate (MeAPO)  
2 molecular sieve, said process comprising the steps of:  
3 providing a source of alumina, a source of phosphorus, water, and  
4 a template suitable for forming a MeAPO molecular sieve;  
5 providing a source of metal including metal particles, said metal  
6 particles measuring, in their largest dimension, equal to or less than five  
7 nanometers;  
8 providing a water soluble organic solvent capable of solubilizing  
9 said source of metal;  
10 forming a synthesis mixture from said source of alumina, said  
11 source of phosphorus, said water, said template, said source of metal,  
12 and said solvent; and  
13 forming a MeAPO molecular sieve from said synthesis mixture.
- 1 2. The method of claim 1 wherein said source of metal is selected  
2 from the group consisting of boron, beryllium, cobalt, gallium, germanium,  
3 iron, manganese, magnesium, nickel, silicon, vanadium, zinc and  
4 combinations thereof.
- 1 3. The method of claim 1 or claim 2 wherein said source of metal is  
2 selected from the group consisting of monomeric metal compound;  
3 oligomeric metal compounds containing metal particles measuring, in their  
4 largest dimension, equal to or less than five nanometers; and mixtures  
5 thereof.
- 1 4. The method of claim 3 wherein said source of metal is monomeric  
2 metal compound.

- 23 -

1 5. The method of claim 2 wherein said source of metal is selected  
2 from the group consisting of tetraalkylorthometallates, colloidal metals,  
3 and metal sols.

1 6. The method of claim 5 wherein said source of metal is a  
2 tetraalkylorthometallate.

1 7. The method of any of the preceding claims further including the  
2 step of providing a morphology modifying agent to said synthesis mixture.

1 8. The method of claim 7 wherein said morphology modifying agent is  
2 selected from the group consisting of a surfactant, divalent cations of  
3 alkali earth metals, divalent cations of transition metals, trivalent cations,  
4 seeds of molecular sieves, and recycled synthesis mixture.

1 9. The method of claim 8 wherein said morphology modifying agent is  
2 one or more surfactants selected from the group consisting of: long chain  
3 alkylamines, such as hexadecylamine, tetradecylamine, dodecylamine,  
4 decylamine, or octylamine; dimethyl alkylamine compounds, such as  
5 dimethylhexadecylamine or dimethyloctylamine; and  
6 trimethylalkylammonium salts, such as trimethylhexadecylammounium  
7 chloride.

1 10. The method of any one of the preceding claims wherein said water  
2 soluble organic solvent is selected from the group consisting of sulfoxides  
3 and C<sub>1</sub> to C<sub>5</sub> oxygenated hydrocarbons.

1 11. The method of any one of the preceding claims wherein said  
2 MeAPO molecular sieve is a SAPO molecular sieve.

1 12. An isocrystalline spheroidal particle comprising a SAPO molecular  
2 sieve made by the method of any one of the preceding claims.

1 13. The particle of claim 12 wherein said SAPO is SAPO-34.



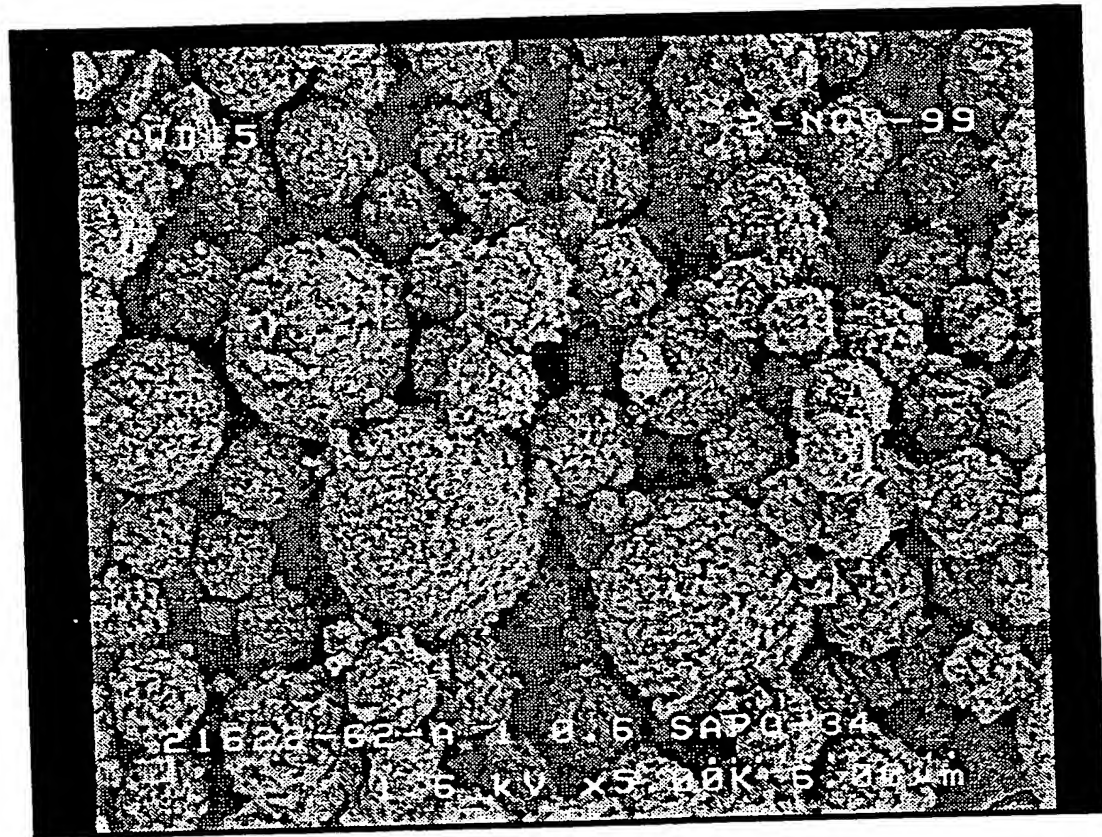


Figure 1

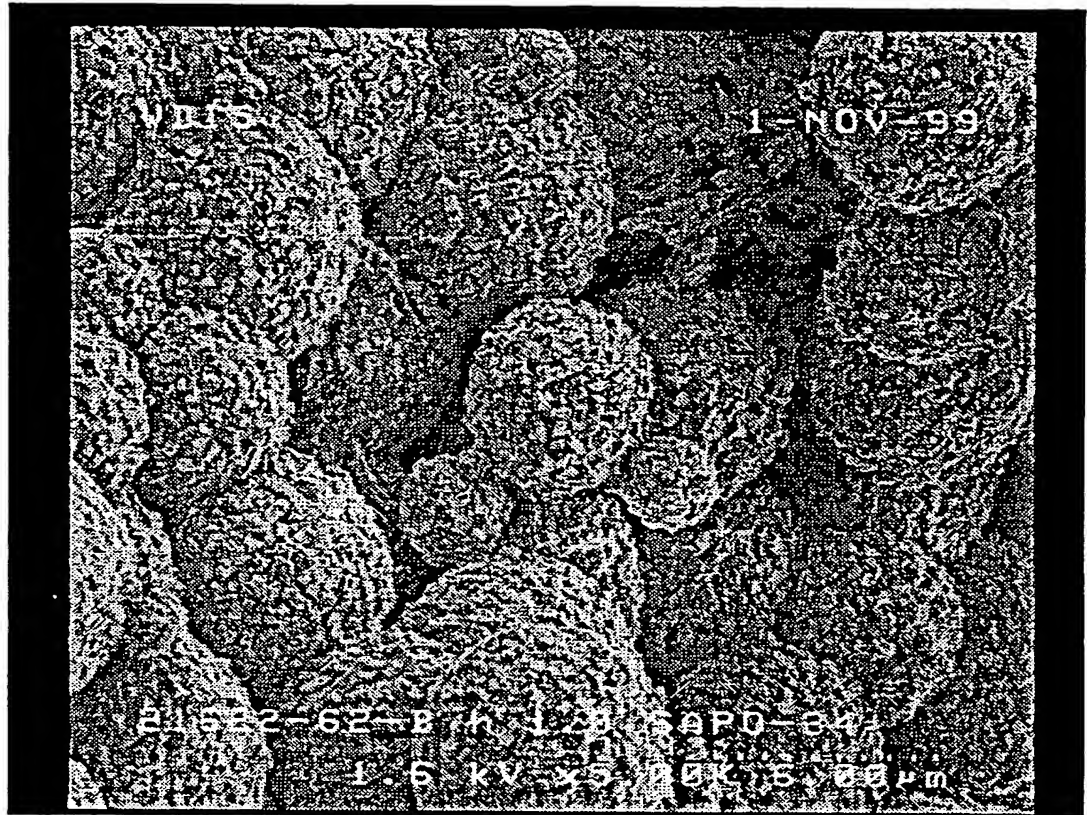


Figure 2

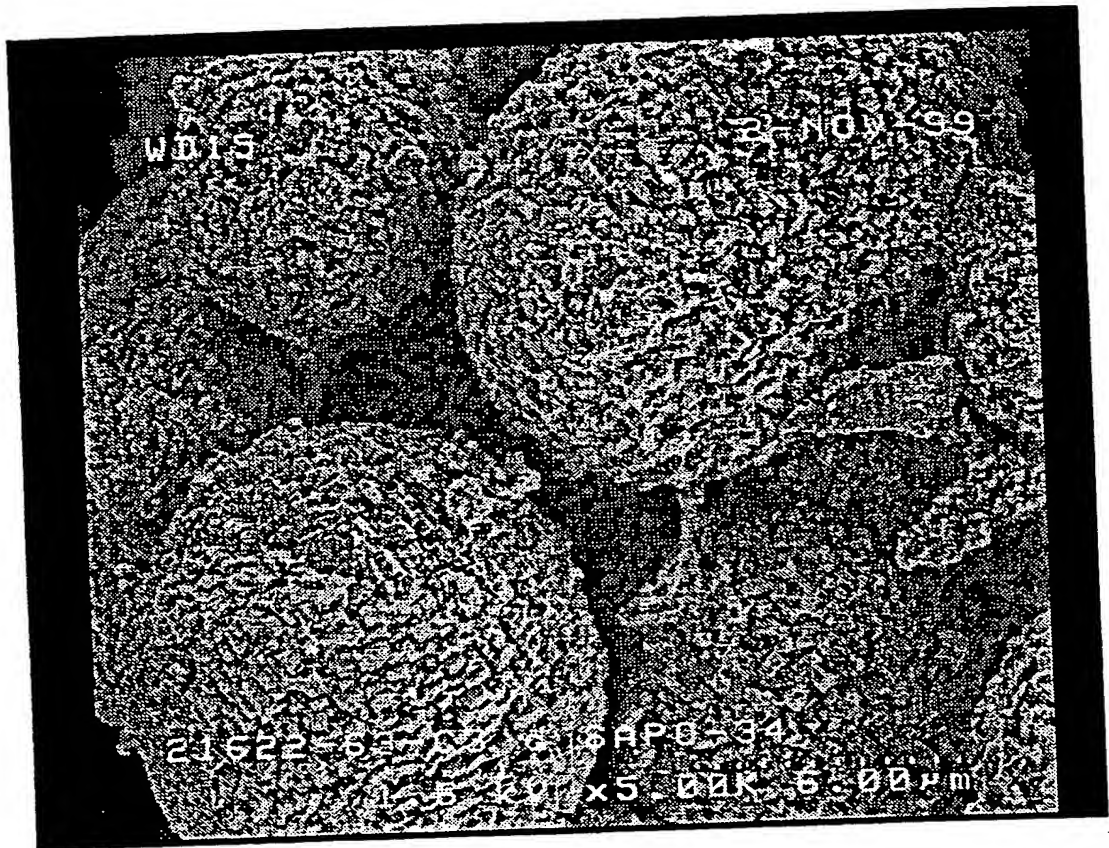


Figure 3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/30319

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 C01B37/06 C01B37/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 C01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, INSPEC, COMPENDEX, EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 99 61372 A (EXXON RESEARCH AND ENGINEERING COMPANY) 2 December 1999 (1999-12-02) page 9, line 5 -page 12, line 11 example 1	1-12
X	WO 99 19254 A (EXXON CHEMICAL PATENTS INC) 22 April 1999 (1999-04-22) claims 1,2 page 4, line 19 - line 22 page 6, line 9 - line 14	1-6, 10-12
X	WO 89 01912 A (THE DOW CHEMICAL COMPANY) 9 March 1989 (1989-03-09) claims 15,28-30 page 13, line 33 -page 14, line 17 page 16, line 4 - line 11 -/--	1-6,11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*S\* document member of the same patent family

Date of the actual completion of the international search

20 February 2001

Date of mailing of the international search report

28/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Rigondaud, B

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/30319

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 300 277 A (KRESGE CHARLES T ET AL) 5 April 1994 (1994-04-05) column 10, line 9 - line 66 -----	1-3, 5, 10-12
A	EP 0 185 525 A (MOBIL OIL CORP) 25 June 1986 (1986-06-25) column 5, line 42 -column 6, line 56 example 5 -----	1, 11
A	EP 0 166 520 A (MOBIL OIL CORP) 2 January 1986 (1986-01-02) claim 8 -----	1, 11
A	EP 0 391 774 A (ELF FRANCE) 10 October 1990 (1990-10-10) page 3, line 15 - line 20 example 10 -----	1, 11-13

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/30319

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9961372 A	02-12-1999	AU 4201199 A	13-12-1999
		AU 4201299 A	13-12-1999
		AU 4201399 A	13-12-1999
		AU 4201499 A	13-12-1999
		AU 4201599 A	13-12-1999
		AU 4311999 A	13-12-1999
		AU 4542999 A	13-12-1999
		EP 1062294 A	27-12-2000
		EP 1062299 A	27-12-2000
		EP 1062303 A	27-12-2000
		EP 1062295 A	27-12-2000
		EP 1062304 A	27-12-2000
		EP 1054835 A	29-11-2000
		EP 1062300 A	27-12-2000
		WO 9961552 A	02-12-1999
		WO 9961555 A	02-12-1999
		WO 9961556 A	02-12-1999
		WO 9961558 A	02-12-1999
		WO 9961553 A	02-12-1999
		WO 9961559 A	02-12-1999
WO 9919254 A	22-04-1999	US 6162415 A	19-12-2000
		AU 9785098 A	03-05-1999
		EP 1027284 A	16-08-2000
		NO 20001950 A	09-06-2000
WO 8901912 A	09-03-1989	US 5374411 A	20-12-1994
		AU 2423388 A	31-03-1989
		AU 612713 B	18-07-1991
		CN 1036376 A,B	18-10-1989
		EP 0333816 A	27-09-1989
		FI 891964 A,B,	25-04-1989
		HU 52003 A,B	28-06-1990
		IL 87606 A	21-06-1992
		JP 3505720 T	12-12-1991
		JP 5074523 B	18-10-1993
		KR 9104854 B	15-07-1991
		NO 891752 A	13-06-1989
		RO 104858 B	01-04-1993
		RU 2021975 C	30-10-1994
		ZA 8806410 A	25-04-1990
US 5300277 A	05-04-1994	US 5102643 A	07-04-1992
		US 5198203 A	30-03-1993
		AU 644136 B	02-12-1993
		AU 7214891 A	21-08-1991
		CA 2072352 A	26-07-1991
		DE 69106121 D	02-02-1995
		DE 69106121 T	04-05-1995
		DK 512026 T	20-03-1995
		EP 0512026 A	11-11-1992
		ES 2072602 T	16-07-1995
		JP 5503499 T	10-06-1993
		KR 172612 B	18-02-1999
		US 5378440 A	03-01-1995
		WO 9111390 A	08-08-1991
		US 5370785 A	06-12-1994
		US 5108725 A	28-04-1992

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/30319

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5300277 A		US 5098684 A	24-03-1992
		US 5156829 A	20-10-1992
		US 5110572 A	05-05-1992
		US 5104515 A	14-04-1992
		US 5112589 A	12-05-1992
		US 5183561 A	02-02-1993
		US 5837639 A	17-11-1998
		US 5264203 A	23-11-1993
		US 5238676 A	24-08-1993
		US 5258114 A	02-11-1993
		US 5246689 A	21-09-1993
		US 5174888 A	29-12-1992
		US 5211934 A	18-05-1993
		US 5215737 A	01-06-1993
		US 5196633 A	23-03-1993
		US 5200058 A	06-04-1993
		US 5304363 A	19-04-1994
		US 5220101 A	15-06-1993
		US 5250282 A	05-10-1993
		US 5334368 A	02-08-1994
		AU 663885 B	26-10-1995
		AU 2383792 A	23-02-1993
		DE 69230937 D	25-05-2000
		DE 69230937 T	17-08-2000
		DK 597954 T	17-07-2000
		EP 0597954 A	25-05-1994
		JP 2000512608 T	26-09-2000
		WO 9302013 A	04-02-1993
EP 0185525 A	25-06-1986	US 4898722 A	06-02-1990
		AU 566679 B	29-10-1987
		AU 5052585 A	26-06-1986
		BR 8506359 A	02-09-1986
		CA 1253838 A	09-05-1989
		DK 589485 A	20-06-1986
		JP 61151021 A	09-07-1986
		NZ 214236 A	30-06-1988
		ZA 8509130 A	29-07-1987
EP 0166520 A	02-01-1986	US 4619818 A	28-10-1986
		AT 61318 T	15-03-1991
		AT 61026 T	15-03-1991
		AU 578440 B	27-10-1988
		AU 3688584 A	04-07-1985
		AU 576579 B	01-09-1988
		AU 4271085 A	05-12-1985
		BR 8406580 A	15-10-1985
		BR 8502595 A	04-02-1986
		CA 1244224 A	08-11-1988
		CA 1259774 A	26-09-1989
		DE 3484237 D	11-04-1991
		DE 3581843 D	04-04-1991
		DK 239385 A	01-12-1985
		DK 606484 A	20-06-1985
		EP 0147991 A	10-07-1985
		ES 538735 D	01-04-1986
		ES 8606015 A	01-10-1986
		ES 543596 D	16-07-1986

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/30319

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0166520 A		ES 8609348 A	16-12-1986
		IN 164748 A	20-05-1989
		IN 164749 A	20-05-1989
		IN 163776 A	05-11-1988
		JP 61010014 A	17-01-1986
		NZ 210462 A	30-06-1988
		NZ 212070 A	29-04-1988
		US 4880611 A	14-11-1989
		ZA 8504138 A	28-01-1987
EP 0391774 A	10-10-1990	FR 2645141 A	05-10-1990
		JP 2280840 A	16-11-1990
		US 5096684 A	17-03-1992



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**